

## "RUPI CABLE- AND WIRESTOCKINGS, SIMPLY BRILLIANT AND INDISPENSABLE"

# CUPI-COLOSICE, EMBH

### YOUR SPECIALIST AROUND CABLE AND WIRE

#### Cable and rope support stockings

>> RP- 700



Mainly for fastening, holding and mounting as well as the strain relief of movable cables and lines on cranes, shaft and lifting devices. The advantage against conventional suspensions with clamps lies in the prevention of point stress and excluding kinking and breaking leads. These stockings are particularly suita-

ble and in use worldwide for wind power plants, as well as in floating cranes, suspension railways and cranes. The highly dual-strand mesh made of galvanized steel and handwoven, fitted with the suspension eyelets (round thimbles), so they can be mounted at any position on the cable before installation.





(2-layered / standard)




(3-layered / enhanced)

**RP-700**:

Available in standard lengths 700 mm, (500 mm braiding, 200 mm head). Other lengths upon request! Also available in the following design:

- >> STAINLESS STEEL (STAINLESS STEEL BRAIDING)
- >> STAINLESS STEEL REINFORCED (three-layer design for higher tensile strength)
- >> STRAINED BOWDEN CABLE
- >> PLASTIC COATED STRANDS

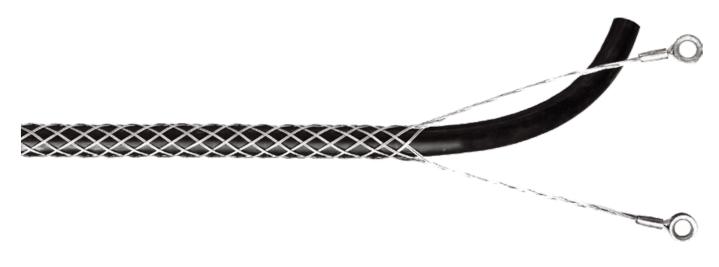

rupi-Cologne, GmbH

Phone + Fax +49(0)2234-95395- 0

+49(0)2234-95395- 22

info@rupi-cologne.de www.rupi-cologne.de

E-mail + Web

26

Industriestr. 30-32 "Einfahrt Siemensstraße" 67269 Grünstadt Germany



### "RUPI CABLE- AND WIRESTOCKINGS, SIMPLY BRILLIANT AND INDISPENSABLE"

## CUPI-COLOSNE! SMBH

### YOUR SPECIALIST AROUND CABLE AND WIRE

#### Cable and rope support stockings

>> RP- 700

For cables and ropes with ø from - to	Permissible tension load in kN / tons approx.	Thimble size for bolt ø approx. mm	Part number
08 - 15 mm	5,12 / 0,52	13	RP - 710
15 - 20 mm	6,40 / 0,65	18	RP - 715
20 - 30 mm	6,40 / 0,65	18	RP - 720
30 - 40 mm	8,96 / 0,91	20	RP - 730
40 - 50 mm	12,48 / 1,27	20	RP - 740
50 - 60 mm	13,87 / 1,41	20	RP - 750
60 - 80 mm	13,87 / 1,41	20	RP - 760
70 - 80 mm	25,60 / 2,61	flexible rope eyelets	RP - 770
80 - 100 mm	28,80 / 2,94	flexible rope eyelets	RP - 780
100 - 120 mm	35,60 / 3,63	flexible rope eyelets	RP - 7100



Greater loads and higher tensile forces and special designs on request. Produceable immediately.

27

Industriestr. 30-32 "Einfahrt Siemensstraße" 67269 Grünstadt Germany

rupi-Cologne, GmbH

Phone + Fax

+49(0)2234-95395- 0 +49(0)2234-95395- 22 info@rupi-cologne.de www.rupi-cologne.de

E-mail + Web